


Model 25

BAND SLICER

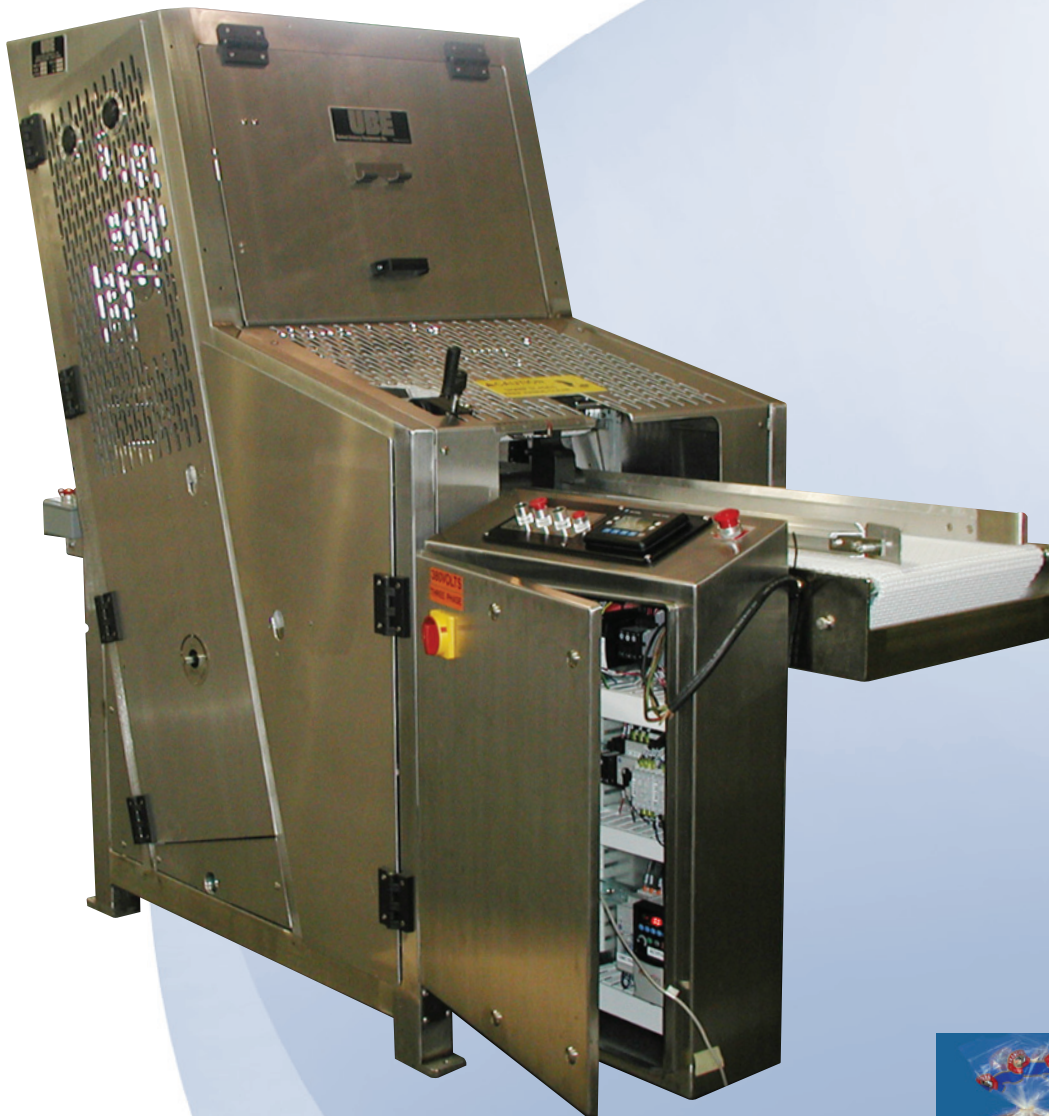

West Coast Sales & Manufacturing

19216 S. Laurel Park Road Rancho Dominguez, CA 90220

Tel: 310.635.8121 • Fax: 310.635.8171

sales@ubeusa.com

Mid-West Sales & Manufacturing

15815 W. 110th Lenexa, KS 66219

Tel: 913.541.8700 • Fax: 913.541.0781

officeks@ubeusa.com

www.ubeusa.com



The new Model 25 is a simplified, smaller version of our Model 90-75 and is suited for smaller budgets and medium production.

Specifications

Speed range

up to 30 loaves per minute

Min./Max. product size range

6" x 3" x 3" / 16" x 10" x 6" (l-w-h)

[152 x 76 x 76mm / 406 x 254 x 152mm] (l-w-h)

Blades

156" x .012" x 7/16"

[3'962 x 0.305 x 11.113mm] (l-t-w)

Electrical

208/230/380/460 v, 3 ph, 50/60 hz

Features

- New square tube stainless steel frame w/easy access aluminum guarding.
- High tolerance ceramic blade guides for smooth accurate slices.
- Grip top infeed conveyor for positive loaf feed to blades.
- Integrated hand bag loader fed by belted outfeed conveyor.
- Hand knob infeed rail adjustment with calibrated scales.
- Simplified controls, door safety switches, broken blade shut-off.
- Fixed slice thickness to buyer's specification.

Options

- Spray or felt oiling systems eliminate heat and gluten build up on blades & guides.
- Adjustable slice thickness from 3/8" to 5/8" [9.5mm to 16mm] and other ranges.
- Manually operated blade hone with ceramic stones.
- 20" [508mm] loaf length capacity and other special requirements.
- Conveyor with bag closer for efficient two person operation.
- CE Approval, guards and coded magnetic door switches.
- UL Approval.
- CSA Approval.
- Available in metric construction (where possible).

Technical Layout:

