



Range of California, Inc.

Electric Convection Oven - Standard Depth

Models: ☐ RECO-1 ☐ RECO-2 ☐ RECO-6K-1 ☐ RECO-6K-2



Item: _____

Quantity: _____

Project: _____

Voltage:

☐ 208 - 1 Phase ☐ 208 - 3 Phase*

☐ 240 - 1 Phase ☐ 240 - 3 Phase*

*Not available for 6K units

Options and Accessories

- ☐ Stainless steel bottom shelf (Single Deck Only)
- ☐ Stacking kit to stack two single deck units (includes 6" legs)
- ☐ 5" swivel casters (set of four - 2 locking)
- ☐ Extra oven racks (Qty: _____)
- ☐ Glass view door for left side (right is standard)
- ☐ Pan rack (Single Deck Only)
- ☐ 480 Voltage (3 Phase Only)
- ☐ Moisture injection

Standard Features

- Accommodates full size sheet pans side to side
- 3 heating elements for a total of 9 KW power (RECO Models Only)
- 2 heating elements for a total of 6 KW power (RECO-6K Models Only)
- Electric thermostat adjustable from 150° to 500° F
- Two speed motor
- Cool touch controls set back for protection
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135° for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides, and top construction
- Oven interior useable space: 29" W x 22½" D x 24" H
- One year limited warranty, parts and labor



Royal Range of California, Inc.






3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com



Electric Convection Oven - Standard Depth

Electric Convection Oven - Standard Depth

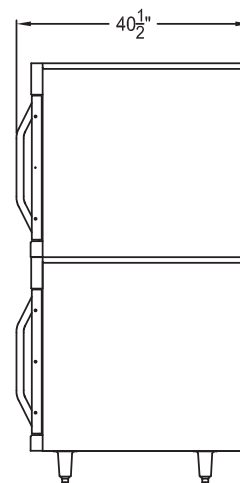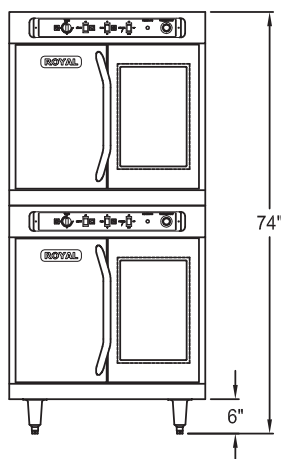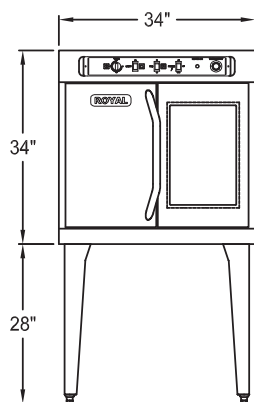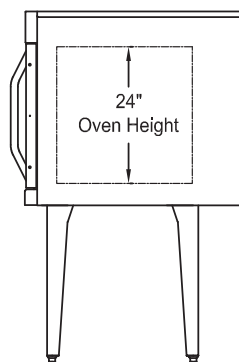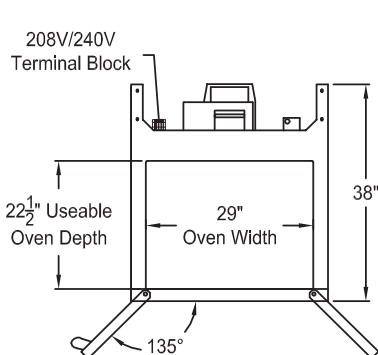

Model Number	Total KW	Ship Weight
RECO-1	9	495 lbs.
RECO-2	18	940 lbs.
RECO-6K-1	6	495 lbs.
RECO-6K-2	12	940 lbs.

Electrical: Two speed motor (1725/1140 rpm) 230V, 50/60 Hz, 1/2 HP
Terminal block for power cord connection with ground lug.

Heating Elements:

Voltage (V)	Phase	Total KW	Current (Amps)
208	1	9	45
208	3	9	L1-26, L2-25, L3-25
240	1	9	39
240	3	9	L1-23, L2-22, L3-22
480	3	9	L1-12, L2-11, L3-11
208 (6K)	1	6	29
240 (6K)	1	6	25

Clearances:

	Combustible	Non-Combustible
Rear	0"	0"
Sides	0"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com